


SunWize® SW-S150P Solar Module

High performance for industrial applications

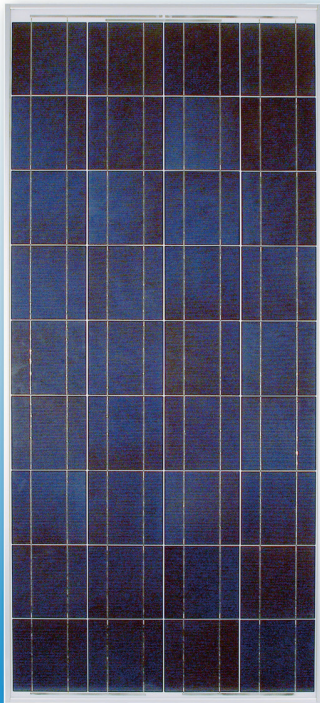

The SunWize SW-S150P solar module

The SunWize SW-S150P solar module delivers top-quality performance for all photovoltaic applications including telemetry, communications, security, rural electrification, water pumping and general battery charging. The SW-S150P can be used in single-module and multiple-module installations. Each module consists of 36 solar cells connected in series providing sufficient voltage for battery charging under extreme high temperatures. The modules are manufactured according to the strict requirements of international and US quality standards. Warranty: 5 -Year Limited Warranty of Materials and Workmanship; 20 -Years Limited Warranty of 80% Minimum Power Output.


Features include:

- The glass surface is impact resistant and allows maximum light transmission.
- Polycrystalline solar cells are encapsulated and bonded to the glass in multiple layers of ethylene vinyl acetate (EVA) and laminated with a white Tedlar™ backing insuring long life in severe environmental conditions.
- A weather resistant junction box accommodates all wiring methods including moisture-tight strain relief connectors and electrical conduit. Bypass diodes insure reliable operation.
- Anodized aluminum tubular frames add strength and durability. Frames come with predrilled mounting holes.

Model	Rated Power (Watts)	Rated Voltage (Vmp)	Rated Current (Imp)	Open Circuit Voltage (Voc)	Short Circuit Current (Isc)	Weight
SW-S150P	150	18.1V	8.3 A	22.2V	8.5A	25.4 lbs.

Standard Test Conditions (STC): 1000 W/m², 25°C, AM 1.5

Mechanical Specifications

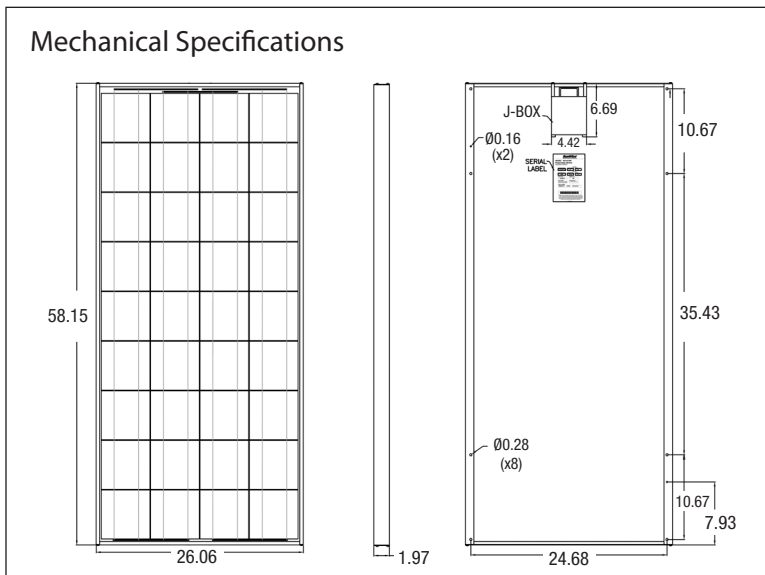

Electrical / Thermal Parameters

Max System Voltage	600Vdc
Series Fuse Rating	15 Amps
Voltage Temperature coefficient (Voc)	-0.35%/C
Current Temperature coefficient (Isc)	0.065%/C
Power Temperature coefficient (Pmax)	-0.5%/C
Peak Power Tolerance	+/-5%