

TSM-DA01

The Universal Solution

-  Easy installation and handling for various applications
-  Module bears load up to 5400Pa
-  Guaranteed power output (0~+3%)
-  Independently certified by international certification body (TUV, UL, ICIM, VDE, JET and SGS)*
-  Manufactured according to International Quality and Environment Management System (ISO9001, ISO14001)



Trina Solar's best selling panel since 2004. One of the world's most reliable panels, tested and proven by internationally renowned institutions such as the TUV Rheinland and the Desert Knowledge Australia Center. Satisfying our customers all around the globe, the TSM-DA01 works in any type of installation, from off-grid systems in Tibet to large commercial rooftops in New Jersey and ground-mounted projects in the Australian desert.

Trina Solar, **the best \$/kWh** value under the sun




Trina Solar (U.S.), Inc.
100 Century Center,
Suite 340, San Jose CA 95112,
USA

T +1 800 696 7114
F +1 800 696 0166
E usa@trinasolar.com


Founded in 1997, Trina Solar is a vertically integrated PV manufacturer, producing everything from ingots to modules, using both mono and multicrystalline technologies. At the end of 2009, the company had a nameplate module capacity of 600MW. Trina Solar's wide range of products are used in residential, commercial, industrial and public utility applications throughout the world.

Only by matching an efficient cost-structure with proven performance will we, as an industry, achieve grid parity. And at Trina Solar, we have both.

Dimensions of PV module TSM-DA01

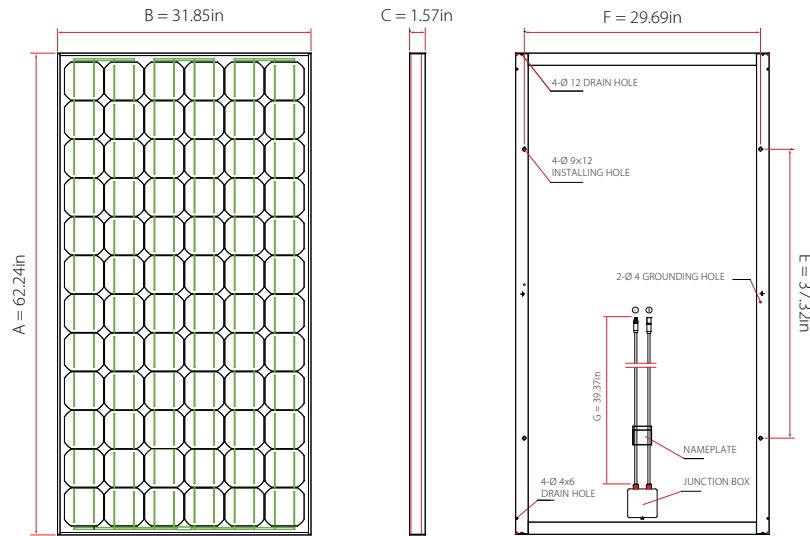

I-V Curves of PV module TSM-180DA01

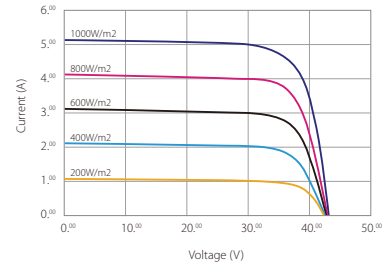

Efficiency	up to 14.50
Wattage	up to 185
Years warranty	25

Certification



Electrical Data @ STC

	TSM-175DA01	TSM-180DA01	TSM-185DA01
Peak Power Watts- P_{MAX} (WP)	175	180	185
Power Output Tolerance- P_{MAX} (%)	0/+3	0/+3	0/+3
Maximum Power Voltage- V_{MAX} (V)	36.20	36.80	37.50
Maximum Power Current- I_{MPP} (A)	4.85	4.90	4.95
Open Circuit Voltage- V_{OC} (V)	43.90	44.20	44.50
Short Circuit Current- I_{SC} (A)	5.30	5.35	5.40
Encapsulated Cell Efficiency η_c (%)	16.40	16.80	17.30
Module Efficiency η_m (%)	13.70	14.10	14.50

Values at Standard Test Conditions STC (Air Mass AM1.5, Irradiance 1000W/m², Cell Temperature 25°C)

General Data

Cell Type	5 x 5in Monocrystalline silicon, 72pcs in series
Glass	High Transmission, Low Iron, Tempered Glass 0.12in
Frame	Anodized Aluminum, 12 Draining Holes in Frame
Junction Box	12AGW, UL Certified with Tyco connector

Temperature Ratings

Nominal Operating Cell Temperature (NOCT)	47°C (±2°C)
Temperature Coefficient of P_{MPP}	- 0.45%/°C
Temperature Coefficient of V_{OC}	- 0.35%/°C
Temperature Coefficient of I_{SC}	0.05%/°C

Mechanical and Packing Configuration

Dimensions (A x B x C)	62.24 x 31.85 x 1.57in
Installation Hole Dimensions (E x F)	37.32 x 29.69in
Cable length (G)	39.37in
Weight	34.40lb
Packing Configuration	23pcs/carton
Quantity/Pallet	1carton/pallet
Loading Capacity	644pcs/40ft, 276pcs/20ft

Maximum Ratings

Operating Temperature	-40 ~ +85°C
Storage Temperature	-40 ~ +85°C
Maximum System Voltage	600VDC
Number of Bypass Diodes	3pcs
Maximum Series Fuse	9A

Warranty

5 years manufacturing warranty
10 years warranty, 90% power output
25 years warranty, 80% power output



CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS BEFORE USING THE PRODUCT.

© January 2010 Trina Solar Limited. All rights reserved. Specifications included in this datasheet are subject to change without notice.